



It is possible to connect two tanks together using the 3/4" BSP threads near the base of the water butt. Please use the 3P Connection Set 25 mm (Art. No. 9000326).




The Norway water butt is delivered with accessory kit including a brass tap, optional wall bracket, and screws. If in any doubt during installation, please consult a professional tradesman, or the supplier of your filter or diverter.

Instructions

To fill the Norway, we recommend using the 3P 3P Filter Collector with Push-Fit Connector Kit for Sealed Tanks to fill the rainwater tank. The Filter Collector is available in three colours: Black, Grey and Brown. (Code: 20008*0ST).



Where the water butt cannot be located within 30cm of the downpipe, the longer Long Kits are available online (Art. No. 9000123ST to ST5).



1. Setting Up

Site the Norway on a firm, level surface adjacent to a downpipe.

To allow for deflection, fill the tank with water before attaching the wall bracket. Refer to your Filter Collector or diverter supplier's instructions. This is a sealed tank so you cannot use a backnut to make a connection through the tank wall.

2. Connection to the Downpipe

The recommended filter/diverter is the 3P Filter Collector with Push-Fit Connection for Sealed Tanks. Code 2000840ST.

If you have another diverter, please refer to the instructions for your selected downpipe filter.

For the 3P Filter Collector with Push-Fit Connection for Sealed Tanks

Locate the area to form a hole for connecting the downpipe filter or diverter.

The centre of the hole needs to be 12.5cm from the top and centred on the vertical "wooden" side panel that will be closest to the wall.

Use the hole-saw set, taking care to select the correct saw size.

Choose the **44mm** holesaw. Double check sizes before drilling.

Insert the supplied grommet into the hole and ensure that a the inside of the grommet fits neatly onto the inside of the tank. **This is important** because the water tight seal is made on the inside of the tank. Use a finger to feel the seal inside the tank and adjust the seal as required.

Push the Hose into the grommet (washing-up liquid or silicone grease will help ease this) and onto the outlet of the 3P Filter Collector.



Centre of hole, approx
12.5cm from top
(centred on vertical panel)

**IF IN ANY DOUBT
CONSULT YOUR
SUPPLIER OR
A PROFESSIONAL**



3. Connecting the Tap


Screw the 3/4" metal tap provided into the 3/4" BSP connection thread.

If necessary, use PTFE tape when installing the tap to enhance the watertight seal and to ensure the tap sits in the correct VERTICAL position. Do not over tighten.

4. Base Threads & Winter Care Precautions

During extremely cold winters, where daytime temperatures are below zero for several days, it is wise to ensure that the tank is only about 2/3rd's full and the water supply turned off. This will prevent the frozen water from expanding and damaging the tank.

The 3/4" BSP threaded ports at the base can also be used to connect pumps or other tanks to the Norway *.

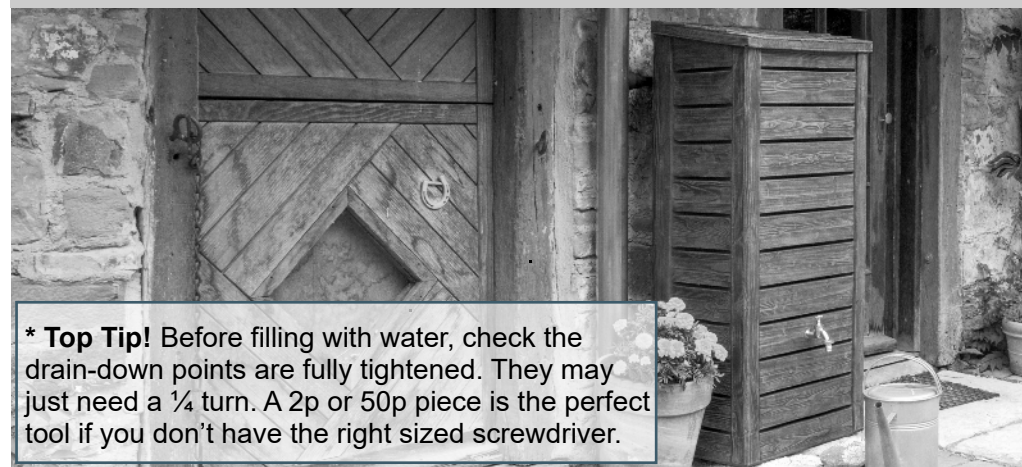

*** Top Tip!** Before filling with water, check the drain-down points are fully tightened. They may just need a 1/4 turn. A 2p or 50p piece is the perfect tool if you don't have the right sized screwdriver.