



5. Removeable Plant Pot

Under the lid is a removable plant pot with retractable handles. To remove, simply pull up the handles (one on each side) and lift.



6. Tank-to-Tank Connection

If you wish, you can connect two Tubo Water Butts together using the 3/4" drain down point near the base.

The 1m long 3P 3/4" Tank to Tank Connection Kit is ideal (Art No. 9000326L).



Instructions

To fill the Tubo, we recommend using the 3P Filter Collector Universal.

Where the water butt cannot be located within 30 cm of the downpipe, the longer Universal Long Link Kits are available online (Art. No. 9000123U to U5).



The 3P Filter Collector Universal is available in colours to match your downpipe; black, grey and brown.

The Tubo is delivered with an accessory kit which includes a chrome-plated brass tap, wall bracket, and screws.

If in any doubt during installation, please consult a professional tradesperson or the supplier of your filter or diverter.



1. Setting up

Site the rain tank on a firm, level surface adjacent to a downpipe.


Read through these instructions and the 3P Filter Collector Instructions or other rain diverter instructions fully before proceeding.

If in any doubt during installation, please consult a professional tradesperson or the supplier of your filter or diverter.

2. Fitting the 3P Filter Collector Universal Link Kit

Marking Out

Note the two slightly flattened circles on either side (towards the back) of the Tubo. These locations are ideal to connect a diverter as the surface texture is less deep in these areas. Measure down 140mm (approx) from the top of the water butt (excluding the lid). This position is ideal for all connections of 32mm (1 1/4") or less and mark the point.

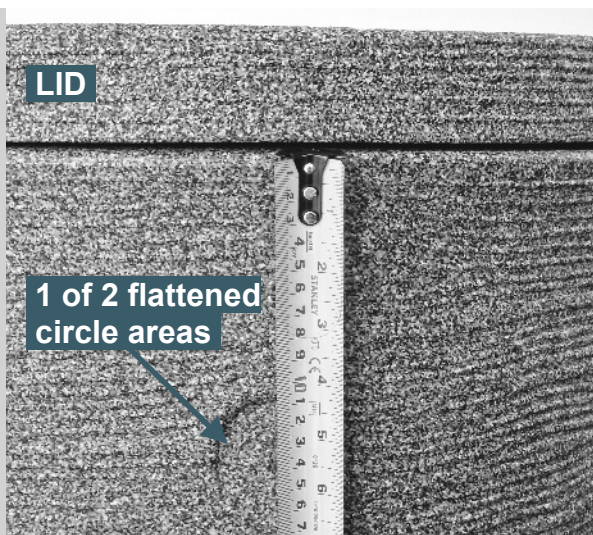

Hole Cutter Selection - 35mm

To fill the water butt with the recommended 3P Filter Collector Universal, select the 35mm flat bit provided with the 3P Filter Collector Universal.

Drilling

Offer the 35mm drill to your marked point, proceed to drill. If you are not fitting a 3P Filter Collector Universal, double check you are drilling the correct sized hole for your chosen connection set.



2. Continued

Attaching a Back-Nut & Hose Tail

Screw the hoesail into the hole then, inside the tank, add the washer followed by the back nut and tighten to give a water tight seal.



3. Connecting the Tap

Screw the 3/4" metal tap provided in the Kit into the 3/4" BSP connection thread. If necessary, use PTFE tape when installing the tap to create a more watertight seal and to allow the tap to sit in the correct position *.

4. Fixing the Wall Bracket (optional)


Fill the tank with water before attaching the wall bracket to avoid deflection. The bracket is optional.

5. Optional Planter

The planter tub can be removed using the retractable handles if desired. However we recommend leaving it in situ for extra child safety where appropriate.

Winter Care Precautions

During extremely cold winters, where daytime temperatures are below zero for several days, it is wise to ensure that the tank is only about 2/3rd's full and the water supply turned off. This will prevent the frozen water from expanding and damaging the tank.

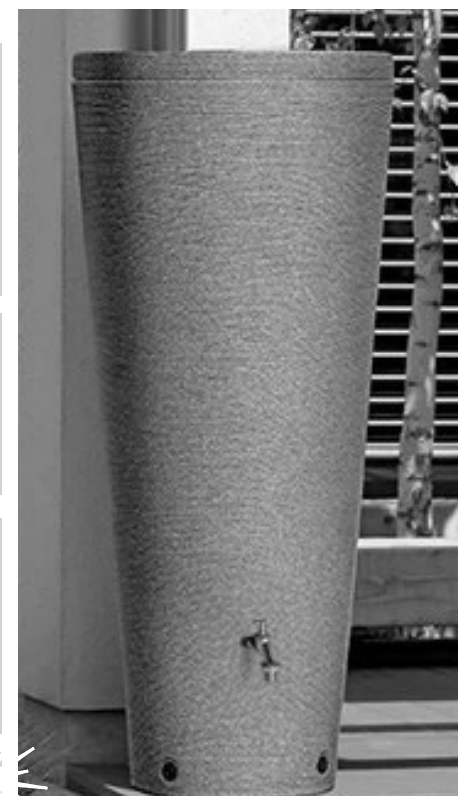

*** Top Tip!** Before filling with water, check the drain-downs point are fully tightened. They may just need a 1/4 turn. A 2p or 50p piece is the perfect tool if you don't have the right sized screwdriver.